



OUTWATER PLASTICS INDUSTRIES, INC.

24 River Road, P.O. Box 500, Bogota, NJ 07603-0500

Phone: 1-800-631-8375 • Fax: 1-800-888-3315 • www.outwater.com

Installation Instructions PDC-NL-220

Rating: AC 120V, 60Hz, 12A

Output: Two 120V AC power outlets, one DC 5V 4.2A USB charger w/ 2 charging ports

CAUTION:

To prevent the risk of fire and electric shock, please be sure to read all instructions before installing or using this unit.


WARNING:

To reduce the risk of fire, electric shock or injury to persons

1. For indoor and dry location use only.
2. Do not use with extension cords.
3. Do not install this device if there is not at least 10 meters (30 feet) or more of wire between the electrical outlet and the electrical service panel.
4. Do not plug a device or devices into receptacles that exceed a total of 12A.
5. Do not open or attempt to open the unit for any reason.

MOUNTING:

1. Cut a 6.42" X 4.02" (163mm X 102mm) hole on the mounting surface.
2. Remove the adhesive tape and protection inserts from the sides of the unit.
3. Set the DOCK-700 unit into the hole.
4. Place the mounting brackets through the included thumb screws. Tighten the screws by hand or use 4 mm hex wrench to secure the DOCK-700 to the desktop. Do not over-tighten the screws.
5. Plug power cord to the nearest wall outlet. Make sure the wall outlet is properly grounded.

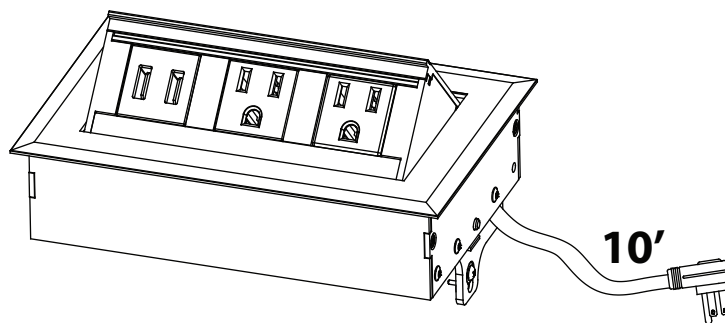

Please contact Outwater at 1-800-631-8375 for assistance.